

Toll-free (U.S./Canada):
1-877-4POLYHI (1-877-476-5944)
tele: 260-479-4100
fax: 260-478-1074

THE CASE IN BRIEF

Application: Bottom Dump Hopper Railcars

Quantity: 45 Hopper Railcars

Liner: TIVAR® 88-2, 3/8" and 1/2" Thick

Bulk Material: Lead, Zinc Concentrate

Substrate: Mild Steel

Problem: Poor discharge of concentrates

Date Installed: 1996

TIVAR® 88-2 Lining Incorporated into Hopper Railcar Design Improves Discharge Rate

▶ BACKGROUND


In the mid-1990s, plant personnel at a Canadian rail company received a mandate to develop and implement a plan to reduce unloading times at the dock and thereby reduce expenses by finding an economical way to modify the 45 existing hopper railcars that transported zinc and lead concentrate. The existing 100-ton railcars were built in 1966 with 45-degree interior sloping walls.

▶ PROBLEM

The zinc concentrate that was transported had a bulk density of 120 lbs. cu. ft. and moisture content of 6%. Due to the 1966 design, only 50% of the material discharged when the doors on the hopper rail car were opened. After bumping the car with a trackmobile three to four times another 35% discharged. Cleaning out the remaining 15% of the ore was a costly and time-consuming process, particularly in light of the time spent using the trackmobile and not receiving complete discharge of material.

▶ SOLUTION

Due to the age and design of the railcars, the company recognized that the cars needed a structural redesign and state-of-the-industry liners in order to achieve acceptable mass flow levels. Working in conjunction with Poly Hi Solidur's SystemTIVAR® team, one car was modified and lined as a test to determine if and how the material would flow. The interior of the car was modified by increasing the sloping walls from 45° to 70°. All wall surfaces of the railcars were lined with 3/8"-thick TIVAR® 88-2, but the discharge doors were covered with stainless steel.

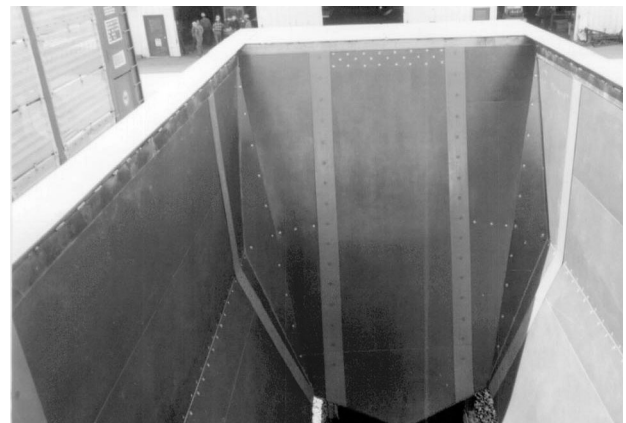

The TIVAR® 88-2 liner panels and TIVAR® "H" profile as a seam protector provide a "super slick" interior surface on which the coal will flow reliably.

▶ RESULTS

The test car, modified and lined with TIVAR® 88-2, completely discharged dry concentrates in 4 seconds and wet concentrates in 14 seconds, surpassing customer expectations. Test results for the stainless steel lining on the discharge doors were not as successful. Excessive sticking on the stainless steel-lined surface caused plant personnel to deem the stainless steel unacceptable for unloading concentrates. The doors were then lined with 1/2"-thick TIVAR® 88-2 (1/2"-thick was used here because more bulk material flows across these areas than elsewhere in the car), eliminating sticking and reliably discharging the concentrates.

Based on the results of the test car, the interior sloping walls of the remaining 44 cars were modified and all were completely lined with TIVAR® 88-2. According to plant personnel, the TIVAR® 88-2 liners continue to perform well over five years later, successfully discharging all material and reducing unloading times and costs.

continued on next page ▶

TEAMWORK PAYS OFF

FOR CN AND BRUNSWICK MINING



These modified hopper cars, due to enter service in September, will result in a faster, more cost-effective way of unloading concentrates.

When Brunswick Mining, a division of Noranda Mining and Exploration Inc., decided to relocate its unloading site from Dalhousie to Belledune, New Brunswick, the shift gave CN and its customer an opportunity to develop a faster, more cost-effective way of unloading concentrates. They put their heads together and came up with a radically modified hopper car, just right for the job.

Mary Taylor, account manager in CN's Industrial Products business unit, attributes the innovation to teamwork: "Our people worked very closely with Brunswick's people, and the synergy between us unleashed a lot of creative thinking. Thanks to their knowledge of the product and our knowledge of rail-roading, we solved the problem in a way that satisfied both companies."

Team members included from Brunswick Mining—engineer Gerry Bisailon, superintendent of Information and Purchasing Services Denis Babin, and concentrator superintendent Larry Urbanoski and from CN—techni-

cian Manning Jay and engineer Pierre Dubé.

BREAKTHROUGH IN EQUIPMENT DESIGN

Unloading a train made up of 25 gondola cars can take up to eight hours. With CN personnel on site, the process can tie up two locomotives and a full crew for an entire day—a costly proposition. The Brunswick/CN team went looking for a solution that would cut unloading time in half. That way, a train could make the return journey between mine and unloading site in a single day.

They challenged the conventional view that concentrates do not flow. They discovered that given the power of gravity, concentrates will indeed flow, if loaded in a rail car with a large bottom dump shape and lined to minimize friction. The team then developed a prototype car with angles suited to the particular product and a large, streamlined "hole" and all surfaces coated with the non-stick product TIVAR® 88-2.

The prototype performed beautifully. Dry concentrates discharged in four seconds, wet concentrates in fourteen. CN's Moncton shops then set to work on modifying 44 hoppers, due to enter service in September.

"The project was extremely gratifying," says Brunswick's Gerry Bisailon. "It showed that anything is possible when you combine expertise and determination." **CN**

* Reprinted courtesy of Canac

MOVIN – CN Summer 1996 34

POLY HI SOLIDUR

A MENASHA SUBSIDIARY



Important: Most plastics will ignite and sustain flame under certain conditions. Caution is urged where any material may be exposed to open flame or heat generating equipment. Use Material Safety Data Sheets to determine auto-ignition and flashpoint temperatures of material or consult Poly Hi Solidur. WARRANTY: Characteristics and applications for products are shown for information only and should not be viewed as recommendations for use or fitness for any particular purpose. TIVAR® and SystemTIVAR® are registered trademarks of Poly Hi Solidur, Inc. 2004© Poly Hi Solidur, Inc., 2710 American Way; Fort Wayne, IN 46809; USA.